

CREAT[®]

ISO9001 CE
www.sprayer-china.com

TAIZHOU 庆丰机械股份有限公司

QINGFENG

MACHINERY CO.,LTD.

Taizhou
Qingfeng Machinery Co.,Ltd.

台州市庆丰机械股份有限公司



Products shall be subject to
any changes without
additional notices.



Everybody is responsible
for environmental protection,
sustainable development!



地址: 浙江省台州市椒江区创业路6号
Add: 6 Chuangye Road, Jiaojiang District, Taizhou City, Zhejiang Province, China
Tel:+86-576-8811 3976 Fax:+86-576-8811 3979
E-mail: sales@sprayer-china.com info@sprayer-china.com qfabby@sprayer-china.com
qf@sprayer-china.com
国内销售电话: +86-0576-88113977 88113978



庆丰品质 创造未来
QINGFENG QUALITY CREATES THE FUTURE



About us

台州市庆丰机械股份有限公司位于浙江海滨城市台州(植保之都),交通方便, 本公司专业生产各种动力喷雾机、汽油机、发电机、清洗机等。凭借先进的生产设备, 完善的检测系统, 产品远销全球, 特别是东南亚、南美、中东等地区。

在多年的发展中我们始终秉承“质量第一, 客户至上”的企业宗旨, 视质量为企业根本; “以客为本、以信立市”为经营理念; 专业经营、点滴为您、致力品牌战略。

台州市庆丰机械股份有限公司热诚欢迎广大客户光临洽谈业务, 并期待着与您真诚合作, 我们坚信在合作与交流中将会与您共创一个辉煌的未来!

Crear Quality Creating The Future.

Taizhou qingfeng machinery Co.,LTD is located in zhejiang coastal city which is the power spray hometown,where the economy is prosperous and the traffic is convenient,Our company specializes in various types of power sprayers,water pump,high pressure washer and so on.The company has been developing by the advanced production equipments and perfect testing systems.Our products are well sold all over the world,especially in southeast asia,south Amercia and Middle east.

For the past years,we always insist in "quality first,customer first",depending on the quality of enterprise fundamental,"customer-oriented,reputation-standed" is the management principle;Concentrate on management,committed to brand strategy for you.

Taizhou qingfeng machinery Co.,LTD warmly welcome customers to negotiate business and look forward to cooperate with you.we believe that we will create a glorious future!





Brand story 增强创新潜能

企业要做大做强，就必须在增强创新潜能的基础上，努力提高产品质量和服务水平。在国内外，每一个长期的知名企业，其产品或服务都离不开优良的品质。因此，质量是企业的生命，是企业的灵魂。一个企业只有不懈的追求，精益求精，才能在行业中处于领先地位。

If enterprises want to become bigger and stronger, they must strive to improve product quality and service level on the basis of enhancing innovation potential. local and abroad, every long-term well-known enterprise, its products or services are inseparable from excellent quality. Therefore, quality is the life of an enterprise and the soul of an enterprise. Only by unremitting pursuit and excellence an enterprise can be in a leading position in the industry.



WISDOM CREATE QUALITY

品质，无微不智

以智入微，铸就钻石品质，庆丰建立了全方位的品质检测体系，着力每一处细节，实现产品品质的完备保障，从采购、生产到入库，全过程严格执行ISO9001质量体系，贯彻推行品质管理。

With wisdom and micro-determination, casting diamond quality, CREAT has established a comprehensive quality testing system, focusing on every detail, to achieve complete guarantee of product quality, from procurement, production to warehousing, the whole process strictly implements the ISO9001 quality system, and implements quality management.

ISO9001 CE




研究和发展

庆丰不断发展；不仅是我们的生产技术、设备和工艺，还有我们不断增长的产品系列和解决方案。

CREAT is constantly evolving; Not only our production technology, equipment and processes, but also our growing product range and solutions.



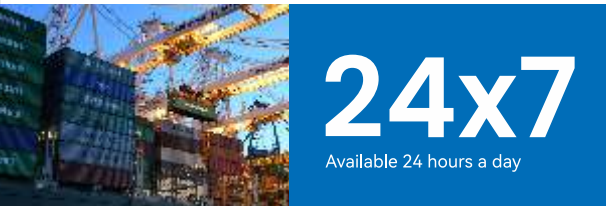

开启您的产品之旅

我们将为您提供全方位的服务以及尽快送达您的产品！
We will provide you with a complete full range of services
As well as getting your items as fast as you can

01-11

POWER SPRAYER SERIES
动力喷雾机系列



12-14

POWER SPRAYER SERIES
汽油机系列



15-17

POWER SPRAYER SERIES
汽油机动力喷雾机系列



18-19

POWER SPRAYER SERIES
水泵系列



20-21

POWER SPRAYER SERIES
园林机械系列



22-24

POWER SPRAYER SERIES
电机系列



25-26

POWER SPRAYER SERIES
手提式清洗机系列



27-28

POWER SPRAYER SERIES
清洗机系列



29-30

POWER SPRAYER SERIES
软管系列



31-32

POWER SPRAYER SERIES
背负式动力喷雾器系列



33

POWER SPRAYER SERIES
喷枪系列



35-38

POWER SPRAYER SERIES
配件系列



Ingenuity & Original Intention

以匠心致初心

庆丰以匠心致初心，坚持用品质回应每一份期待，在社会各界树立了良好的口碑，收获多项殊荣。未来，庆丰将继续加强产品创新和质量提升，以优质的产品服务市场，不忘初心，载誉前行！

With ingenuity and insistence on responding to every expectation with quality, CARET has established a good reputation in all walks of life and won many awards.

In the future, CARET will continue to strengthen product innovation and quality improvement, serve the market with high-quality products, and never forget its original intention, and move forward with honor!



QF-26-1

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	1.5-2
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	7.5
尺码(Dimension)mm	330×280×330



QF-26A (自卸款)

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	1.5-2
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	7.5
尺码(Dimension)mm	330×280×330

QF-26-2

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	1.5-2
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	7.5
尺码(Dimension)mm	330×280×330



QF-26-3

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	1.5-2
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	7.5
尺码(Dimension)mm	330×280×330



QF-26-4

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	1.5-2
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	7.5
尺码(Dimension)mm	330×280×330



QF-26-5

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	1.5-2
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	7.5
尺码(Dimension)mm	330×280×330



QF-26-6

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	1.5-2
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	7.5
尺码(Dimension)mm	330×280×330



QF-26-7

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	1.5-2
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	7.5
尺码(Dimension)mm	330×280×330



QF-26-8

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	1.5-2
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	7.5
尺码(Dimension)mm	330×280×330



QF-26-9

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	1.5-2
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	7.5
尺码(Dimension)mm	330×280×330



QF-30-1

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	30-50
工作压力(Pressure)Bar	20-40
马力(Motor)HP	4.5-6.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×30×20
重量(Weight)kg	10.5
尺码(Dimension)mm	390×300×340



QF-30A (自卸款)

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	30-50
工作压力(Pressure)Bar	20-40
马力(Motor)HP	4.5-6.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×30×20
重量(Weight)kg	10.5
尺码(Dimension)mm	390×300×340



QF-30-2

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	30-50
工作压力(Pressure)Bar	20-40
马力(Motor)HP	4.5-6.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×30×20
重量(Weight)kg	10.5
尺码(Dimension)mm	390×300×340



QF-30-3

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	30-50
工作压力(Pressure)Bar	20-40
马力(Motor)HP	4.5-6.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×30×20
重量(Weight)kg	10.5
尺码(Dimension)mm	390×300×340





QF-30-4

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	30-50
工作压力(Pressure)Bar	20-40
马力(Motor)HP	4.5-6.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×30×20
重量(Weight)kg	10.5
尺码(Dimension)mm	390×300×340



QF-30-5

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	30-50
工作压力(Pressure)Bar	20-40
马力(Motor)HP	4.5-6.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×30×20
重量(Weight)kg	10.5
尺码(Dimension)mm	390×300×340



QF-30-6

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	30-50
工作压力(Pressure)Bar	20-40
马力(Motor)HP	4.5-6.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×30×20
重量(Weight)kg	10.5
尺码(Dimension)mm	390×300×340



QF-30-8

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	30-50
工作压力(Pressure)Bar	20-40
马力(Motor)HP	4.5-6.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×30×20
重量(Weight)kg	10.5
尺码(Dimension)mm	390×300×340



QF-30-9

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	30-50
工作压力(Pressure)Bar	20-40
马力(Motor)HP	4.5-6.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×30×20
重量(Weight)kg	10.5
尺码(Dimension)mm	390×300×340

QF-30-10


转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	30-50
工作压力(Pressure)Bar	20-40
马力(Motor)HP	4.5-6.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×30×20
重量(Weight)kg	10.5
尺码(Dimension)mm	390×300×340



QF-5200

转速(Speed)Rpm	600-800
吸水量(Suction)L/min	300-350
工作压力(Pressure)Bar	10-40
马力(Motor)HP	15.5-24
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3X52X45
重量(Weight)kg	65
尺码(Dimension)mm	600X410X570

QF-50

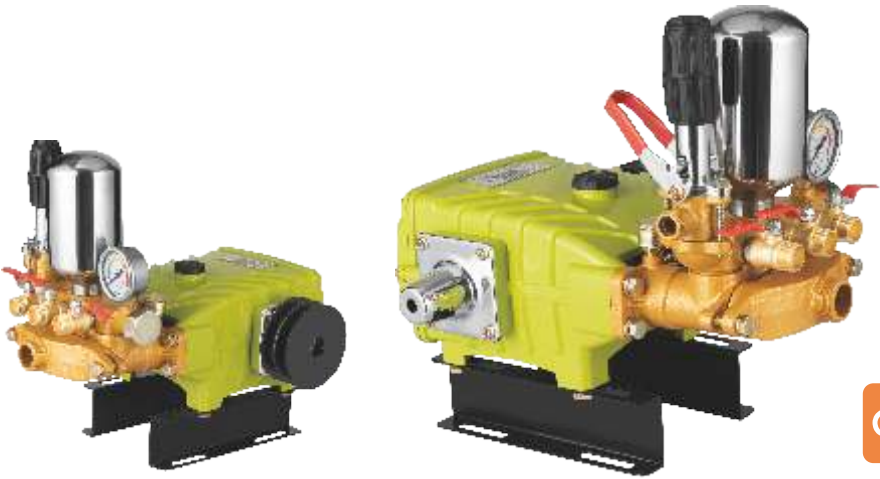

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	40-60
工作压力(Pressure)Bar	20-40
马力(Motor)HP	4.5-7
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×30×22
重量(Weight)kg	13.5
尺码(Dimension)mm	390x300x340

QF-90



转速(Speed)Rpm	600-1000
吸水量(Suction)L/min	50-90
工作压力(Pressure)Bar	10-40
马力(Motor)HP	5.5-9.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	4X30X20
重量(Weight)kg	20
尺码(Dimension)mm	460X360X450

QF-80



转速(Speed)Rpm	600-1000
吸水量(Suction)L/min	40-70
工作压力(Pressure)Bar	10-40
马力(Motor)HP	5.5-9.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×34X24
重量(Weight)kg	20
尺码(Dimension)mm	460X330X450

QF-80A




转速(Speed)Rpm	600-1000
吸水量(Suction)L/min	40-70
工作压力(Pressure)Bar	10-40
马力(Motor)HP	5.5-9.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×34X24
重量(Weight)kg	22
尺码(Dimension)mm	460X330X450

QF-120



转速(Speed)Rpm	600-1000
吸水量(Suction)L/min	70-120
工作压力(Pressure)Bar	7.5-10
马力(Motor)HP	7-9.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×34X38
重量(Weight)kg	31
尺码(Dimension)mm	530X380X540

QF-120A (花轴款)

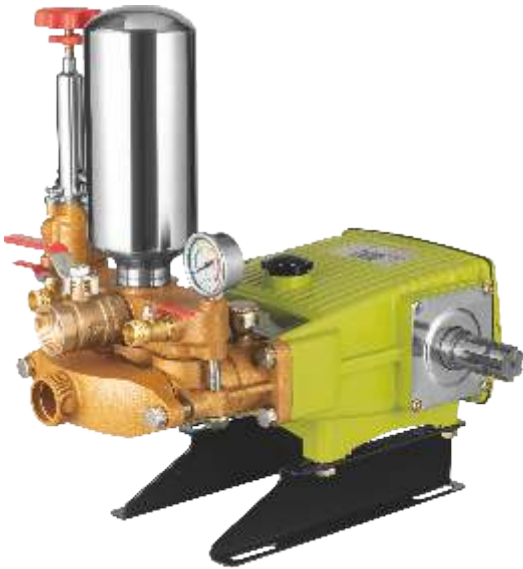

转速(Speed)Rpm	600-1000
吸水量(Suction)L/min	70-120
工作压力(Pressure)Bar	7.5-10
马力(Motor)HP	7-9.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×34X38
重量(Weight)kg	31
尺码(Dimension)mm	530X380X540

QF-150



转速(Speed)Rpm	600-800
吸水量(Suction)L/min	125-170
工作压力(Pressure)Bar	10-40
马力(Motor)HP	9.5-16
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3X45X45
重量(Weight)kg	43
尺码(Dimension)mm	580X400X550

QF-180



转速(Speed)Rpm	600-800
吸水量(Suction)L/min	190-250
工作压力(Pressure)Bar	10-40
马力(Motor)HP	12.5-19
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3X45X45
重量(Weight)kg	48
尺码(Dimension)mm	600X410X570



果园



绿化管理



林木

QF-30-7

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	30-50
工作压力(Pressure)Bar	20-40
马力(Motor)HP	4.5-6.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×30×20
重量(Weight)kg	10.5
尺码(Dimension)mm	390×300×340

精品配件 / Fine accessories



曲轴A / Crankshaft A



曲轴B / Crankshaft B



曲轴C / Crankshaft C



开关加厚
Switch
thickening



曲轴加厚
The crankshaft
is bolded



陶瓷耐磨Ceramic
Wear-resistant
Ceramic



连杆加大
Connecting rod
extension



进口轴承
Imported
bearing



新款调压管
New pressure
regulating tube



四方脚稳重
Square feet
steady



泵壳加厚
Pump casing
thickened

ISO9001 CE
Taizhou qingfeng machinery co.,ltd.

汽油机系列



QF-188

转速(Speed)Rpm	3200-3800
最大扭矩Max.Torque(N.m)	26.5-28
马力(Motor)HP	13-15
重量(Weight)kg	32.5
尺码(Dimension)mm	515x420x190



QF-G1



QF-G2



QF-G3

QF-170A

转速(Speed)Rpm	3000-3600
最大扭矩Max.Torque(N.m)	13
马力(Motor)HP	7.5
重量(Weight)kg	14.3
尺码(Dimension)mm	370x320x345



QF-170B

转速(Speed)Rpm	3000-3600
最大扭矩Max.Torque(N.m)	13
马力(Motor)HP	7.5
重量(Weight)kg	14.3
尺码(Dimension)mm	370x320x345

QF-170-1

转速(Speed)Rpm	3000-3600
最大扭矩Max.Torque(N.m)	13
马力(Motor)HP	7
重量(Weight)kg	14.3
尺码(Dimension)mm	385x320x345



QF-170-2

转速(Speed)Rpm	3000-3600
最大扭矩Max.Torque(N.m)	13
马力(Motor)HP	7
重量(Weight)kg	14.3
尺码(Dimension)mm	385x320x345



QF-170-3

转速(Speed)Rpm	3000-3600
最大扭矩Max.Torque(N.m)	13
马力(Motor)HP	7
重量(Weight)kg	14.3
尺码(Dimension)mm	385x320x345



QF-170-4

转速(Speed)Rpm	3000-3600
最大扭矩Max.Torque(N.m)	13
马力(Motor)HP	7
重量(Weight)kg	14.3
尺码(Dimension)mm	385x320x345



QF-170-5 (双用油箱款)

转速(Speed)Rpm	3000-3600
最大扭矩Max.Torque(N.m)	13
马力(Motor)HP	7
重量(Weight)kg	14.3
尺码(Dimension)mm	385x320x345



QF-170-6

转速(Speed)Rpm	3000-3600
最大扭矩Max.Torque(N.m)	13
马力(Motor)HP	7
重量(Weight)kg	14.3
尺码(Dimension)mm	385x320x345



QF-170-7

转速(Speed)Rpm	3000-3600
最大扭矩Max.Torque(N.m)	13
马力(Motor)HP	7
重量(Weight)kg	14.3
尺码(Dimension)mm	385x320x345



QF-170-8 (减速齿轮款)

转速(Speed)Rpm	3000-3600
最大扭矩Max.Torque(N.m)	13
马力(Motor)HP	7
重量(Weight)kg	14.3
尺码(Dimension)mm	385x320x345





QF-C1

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	7
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	33
尺码(Dimension)mm	610x560x430



QF-C2电启动

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	7
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	33
尺码(Dimension)mm	610x560x430



QF-C3

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	7
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	33
尺码(Dimension)mm	610x560x430



QF-C4

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	7
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	33
尺码(Dimension)mm	610x560x430



QF-25斜盘泵



QF-C5

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	7
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	33
尺码(Dimension)mm	610x560x430



QF-C7

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	7
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	33
尺码(Dimension)mm	610x560x430

QF-C6

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	7
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	33
尺码(Dimension)mm	610x560x430



NEW PRODUCT RECOMMENDATION

产品特点



正宗170汽油机
动力强劲/高效节能



特质加粗曲轴连杆
抗压更耐磨



不锈钢阀门
稳压又耐用



加厚三出水白开关
增效多用



机车传动齿轮
高效比/低能耗



精工加厚机体
品质保证



加粗加厚25管
搭配减震脚垫更耐用



全系配置专为高压耐磨打造！
只为更高品质！
力求既节能又高效！



QF-C8

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	1.5-2
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	33
尺码(Dimension)mm	845x420x370



QF-C9

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	30-50
工作压力(Pressure)Bar	20-40
马力(Motor)HP	4.5-6.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×30×20
重量(Weight)kg	33
尺码(Dimension)mm	800x360x370



QF-C10

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	30-50
工作压力(Pressure)Bar	20-40
马力(Motor)HP	4.5-6.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×30×20
重量(Weight)kg	33
尺码(Dimension)mm	740x390x430



QF-C11

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	1.5-2
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	33
尺码(Dimension)mm	870x430x450



QF-20B

吸程Max.Suction(m)	8
扬程Max Lift(m)	26
转速(Speed)Rpm	2000-3200
吸水量(Suction)L/min	20
进出水口径Inlet/outlet Diameter(inch)	2"
马力(Motor)HP	5.5-7.5
重量(Weight)kg	23
尺码(Dimension)mm	480x380x405



QF-30B

吸程Max.Suction(m)	8
扬程Max Lift(m)	28
转速(Speed)Rpm	2000-3200
吸水量(Suction)L/min	50
进出水口径Inlet/outlet Diameter(inch)	3"
马力(Motor)HP	5.5-7.5
重量(Weight)kg	23
尺码(Dimension)mm	515x390x430

QF-40B

吸程Max.Suction(m)	8
扬程Max Lift(m)	30
转速(Speed)Rpm	2000-3200
吸水量(Suction)L/min	80
进出水口径Inlet/outlet Diameter(inch)	4"
马力(Motor)HP	5.5-7.5
重量(Weight)kg	29
尺码(Dimension)mm	580x390x460





QF-双叶轮水泵

吸程Max.Suction(m)	8
扬程Max Lift(m)	60
转速(Speed)Rpm	2000-3200
吸水量(Suction)L/min	20
马力(Motor)HP	5.5-7.5
重量(Weight)kg	23
尺码(Dimension)mm	520x380x450



QF-超高压水泵-2"

吸程Max.Suction(m)	8
扬程Max Lift(m)	30
转速(Speed)Rpm	2000-3200
吸水量(Suction)L/min	100
进出水口径Inlet/outlet Diameter(inch)	5"
马力(Motor)HP	6.5-8.5
重量(Weight)kg	29
尺码(Dimension)mm	680x390x460



QF-C3

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	7
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	33
尺码(Dimension)mm	610x560x430



QF-电瓶60L园林喷雾

工作压力(Working pressure) MPa	0.2-0.6
药箱容量(Cabinet capacity)	60L
输入/输出电压(Input/output voltage)V	220/12
充电电流(Charging current)A	4.5-5.5
自动收管管长(Automatic tube length)M	15
外形尺寸(Dimension)mm	860x470x970



QF-电瓶160L园林喷雾

功率/转速	0.75kW / 800
流量	30-50
工作压力(Working pressure) MPa	1.0-4.5
铅酸电池	12V20Ax4
药箱容量(Cabinet capacity)	160L
输入/输出电压(Input/output voltage)V	220/48
充电电流(Charging current)A	4.5-6.5
外形尺寸(Dimension)mm	1450X750X880

NEW PRODUCT
RECOMMENDATION

产品特点



正宗170汽油机
动力强劲/高效节能



特质加粗曲轴连杆
抗压更耐磨



不锈钢阀门
稳压又耐用



加厚三出水白开关
增效多用



机车传动齿轮
高效比/低能耗



精工加厚机体
品质保证



加粗加厚25管
搭配减震脚垫更耐用

全系配置专为高压耐磨打造！
只为更高品质！
力求既节能又高效！



QF-300L高压清洗机

工作压力(Working pressure) Bar	250
自动收管管长(Automatic tube length)M	13
流量(flow)	18
配套动力(Cabinet capacity)	13
药箱容量(Cabinet capacity)	300L
转速(Rotational speed)	3600
重量(weight)	98
外形尺寸(Dimension)mm	1420x820x990





QF-100L

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)HP	6.5-7.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3x22x 16
重量(Weight)kg	63
尺码(Dimension)mm	1130x550x700



QF-160L

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	30-50
工作压力(Pressure)Bar	20-40
马力(Motor)HP	6.5-7.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3x30x20
重量(Weight)kg	68
尺码(Dimension)mm	1130x590x700



QF-300L

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	30-50
工作压力(Pressure)Bar	20-40
马力(Motor)HP	6.5-7.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3x30x20
重量(Weight)kg	80
尺码(Dimension)mm	1220x700x860



QF-60L

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	14-22
工作压力(Pressure)Bar	20-45
马力(Motor)HP	168F
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3X22
重量(Weight)kg	53
尺码(Dimension)mm	760X590X850



QF-1.5

转速(Speed)Rpm	910-1400
功率(power)kW	1-1.5
额度电压(Limit current)v	220-240
额定转矩(Rated torque)	1.4-1.4
效率(eficiency)n%	50-51



QF-2.2

转速(Speed)Rpm	910-1400
功率(power)kW	180-250
额度电压(Limit current)v	220-240
额定转矩(Rated torque)	1.5/1.5
效率(eficiency)n%	56/59

QF-3. 0

转速(Speed)Rpm	920-1420
功率(power)kW	300-450
额度电压(Limit current)v	220-240
额定转矩(Rated torque)	1.6/1.6
效率(eficiency)n%	60/67





QF-B1

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	13-22
工作压力(Pressure)Bar	20-40
马力(Motor)kw	1.5
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×22×16
重量(Weight)kg	27.5
尺码(Dimension)mm	740x390x430




QF-B2

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	30-50
工作压力(Pressure)Bar	20-40
马力(Motor)kw	2.2
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×30×20
重量(Weight)kg	30
尺码(Dimension)mm	740x390x430



QF-B3

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	30-50
工作压力(Pressure)Bar	20-40
马力(Motor)kw	2.2
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3×25×20
重量(Weight)kg	30
尺码(Dimension)mm	740x390x430

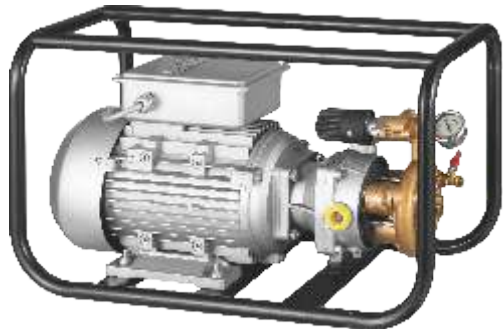

QF-3寸电机

转速(Speed)Rpm	2600-2800
吸水量(Suction)L/min	26-40
马力(Motor)kw	3.0
重量(Weight)kg	35
尺码(Dimension)mm	540x390x430



QF-4寸电机

转速(Speed)Rpm	2600-2800
吸水量(Suction)L/min	40-60
马力(Motor)kW	3.5
重量(Weight)kg	38
尺码(Dimension)mm	540x390x430



QF-齿轮电机

转速(Speed)Rpm	800-1200
吸水量(Suction)L/min	30-50
工作压力(Pressure)Bar	20-40
马力(Motor)kW	3
柱塞数×柱塞径(Plunger no×Dia)Pcs×mm	3x30x20
重量(Weight)kg	80
尺码(Dimension)mm	650x390x430



QF-2.5KW 发电机组

额定电压/Rated Voltage	220V
额定频率/Rated Frequency	50~60Hz
额定输出/Rated Output	2.5kW
最大输出/Maximum Output	2.5kW
功率因数/Power Submultiple	1.0



QF-3KW 发电机组

额定电压/Rated Voltage	220V
额定频率/Rated Frequency	50~60Hz
额定输出/Rated Output	3kW
最大输出/Maximum Output	3kW
功率因数/Power Submultiple	1.0





QF-S1

工作压力/Working pressure	6-9Mpa
最高压力/Maximum pressure	15Mpa
理论流量/Theoretical flow	6-8L/min
配套动力/Supporting power	1.6kw
电源/Power	220V

可调压



QF-S5

工作压力/Working pressure	6-9Mpa
最高压力/Maximum pressure	15Mpa
理论流量/Theoretical flow	6-8L/min
配套动力/Supporting power	1.6kw
电源/Power	220V



QF-S2

工作压力/Working pressure	6-9Mpa
最高压力/Maximum pressure	15Mpa
理论流量/Theoretical flow	6-8L/min
配套动力/Supporting power	1.6kw
电源/Power	220V



QF-S6

工作压力/Working pressure	6-9Mpa
最高压力/Maximum pressure	15Mpa
理论流量/Theoretical flow	6-8L/min
配套动力/Supporting power	1.6kw
电源/Power	220V



QF-S3

工作压力/Working pressure	6-9Mpa
最高压力/Maximum pressure	15Mpa
理论流量/Theoretical flow	6-8L/min
配套动力/Supporting power	1.6kw
电源/Power	220V

可调压



QF-S7

工作压力/Working pressure	6-9Mpa
最高压力/Maximum pressure	15Mpa
理论流量/Theoretical flow	6-8L/min
配套动力/Supporting power	1.6kw
电源/Power	220V



QF-S4

工作压力/Working pressure	6-9Mpa
最高压力/Maximum pressure	15Mpa
理论流量/Theoretical flow	6-8L/min
配套动力/Supporting power	1.6kw
电源/Power	220V



QF-S8

工作压力/Working pressure	6-9Mpa
最高压力/Maximum pressure	15Mpa
理论流量/Theoretical flow	6-8L/min
配套动力/Supporting power	1.6kw
电源/Power	220V





QF-D1

转速(Speed)Rpm	1450
吸水量(Suction)L/min	14
工作压力(Pressure)kW	100
马力(Motor)kW	3
重量(Weight)kg	60
尺码(Dimension)mm	720x390x550



果园



绿化管理



林木

QF-D4

转速(Speed)Rpm	1450
吸水量(Suction)L/min	13
工作压力(Pressure)Bar	80
马力(Motor)kW	3
重量(Weight)kg	55
尺码(Dimension)mm	620x390x550



果园



绿化管理



林木



果园



绿化管理



林木

QF-D2

转速(Speed)Rpm	1450
吸水量(Suction)L/min	15
工作压力(Pressure)kW	300
马力(Motor)kW	13
重量(Weight)kg	108
尺码(Dimension)mm	860x450x550



果园



绿化管理



林木



QF-D5

转速(Speed)Rpm	1450
吸水量(Suction)L/min	13
工作压力(Pressure)Bar	80
马力(Motor)kW	3
重量(Weight)kg	55
尺码(Dimension)mm	620x390x550

QF-D3

转速(Speed)Rpm	1450
吸水量(Suction)L/min	14
工作压力(Pressure)kW	100
马力(Motor)HP	7
重量(Weight)kg	60
尺码(Dimension)mm	720x390x550



果园



绿化管理



林木

QF-D6

转速(Speed)Rpm	1450
吸水量(Suction)L/min	13
工作压力(Pressure)Bar	80
马力(Motor)kW	3
重量(Weight)kg	55
尺码(Dimension)mm	620x390x550



果园



绿化管理



林木



QF-01

PVC三胶两线软管

内径 (mm)	外径 (mm)	工作压力 (bar)	爆破压力 (bar)
8.0	13	50	150
8.5	14	50	150
10	16	50	150
13	19	40	120



QF-02

PVC三胶两线软管


内径 (mm)	外径 (mm)	工作压力 (bar)	爆破压力 (bar)
8.0	13	50	150
8.5	14	50	150
10	16	50	150
13	19	40	120



QF-03

PVC三胶两线软管

内径 (mm)	外径 (mm)	工作压力 (bar)	爆破压力 (bar)
8.0	13	50	150
8.5	14	50	150
10	16	50	150
13	19	40	120

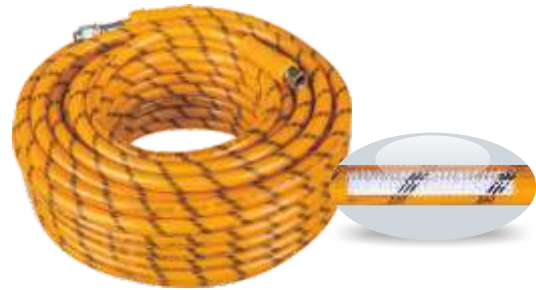

QF-D2

PVC三胶两线软管

内径 (mm)	外径 (mm)	工作压力 (bar)	爆破压力 (bar)
8.0	13	50	150
8.5	14	50	150
10	16	50	150
13	19	40	120



QF-05

扣压机



QF-06

摇管机



QF-07


内径/I.D
19mm



内径/I.D
14mm

QF-08


内径/I.D:19mm



内径/I.D:14mm

QF-09

内径/I.D:19mm



内径/I.D:14mm

QF-10

内径/I.D:21mm



内径/I.D:25mm

QF-11

内径/I.D:38mm



内径/I.D:32mm

QF-12

长度/length: 41cm

内径/I.D:38mm



长度/length: 41cm

内径/I.D:32mm

QF-769

容量/Capacity	15L
常压/Pressure	0.2-0.3Mpa
包装数量/Quantity	1pcs
尺寸/Dimension	400×330×620mm
动力/Power	TU-26



QF-767

容量/Capacity	25L
常压/Pressure	0.2-0.3Mpa
包装数量/Quantity	1pcs
尺寸/Dimension	400×330×650mm
动力/Power	TU-26



QF-768A

容量/Capacity	25L
常压/Pressure	0.2-0.3Mpa
包装数量/Quantity	1pcs
尺寸/Dimension	400×330×650mm
动力/Power	139F



QF-768

容量/Capacity	25L
常压/Pressure	0.2-0.3Mpa
包装数量/Quantity	1pcs
尺寸/Dimension	420×350×640mm
动力/Power	TU-26



QF-708

容量/Capacity	20-25L
常压/Pressure	0.2-0.3Mpa
包装数量/Quantity	1pcs
尺寸/Dimension	400×330×650mm
动力/Power	1E34F



QF-800

容量/Capacity	25L
常压/Pressure	0.2-0.3Mpa
包装数量/Quantity	1pcs
尺寸/Dimension	445×305×600mm
动力/Power	TU-26



QF-900A

容量/Capacity	25L
常压/Pressure	0.2-0.3Mpa
包装数量/Quantity	1pcs
尺寸/Dimension	485×325×640mm
动力/Power	139F



QF-900

容量/Capacity	25L
常压/Pressure	0.2-0.3Mpa
包装数量/Quantity	1pcs
尺寸/Dimension	485×325×640mm
动力/Power	TU-26







QF-TU-26泵头



QF-电机TU-26泵头



QF-01



QF-02



QF-03



QF-04



QF-05



QF-06



QF-07



QF-08



QF-09



QF-10



QF-17红色小喷帽Small red cap



QF-18红色大喷帽Big red cap



QF-19轴流喷帽Axial flow cap



QF-20普通喷帽Normal cap

QF-2500

排量/Displacement	94cc
功率/Horse Power	6.5HP
燃油类别/Fuel type	Gasoline (Petrol)
油箱容量/Fuel Tank Capacity	12.5L
启动方式/Starting System	0.6L
尺寸/Dimension	605X440X445mm
重量/Weight	33KG



QF-2600

排量/Displacement	163cc
功率/Horse Power	6.5HP
燃油类别/Fuel type	Gasoline (Petrol)
油箱容量/Fuel Tank Capacity	12.5L
启动方式/Starting System	0.6L
尺寸/Dimension	605X440X445mm
重量/Weight	40KG



QF-3800

排量/Displacement	196cc
功率/Horse Power	6.5HP
燃油类别/Fuel type	Gasoline (Petrol)
油箱容量/Fuel Tank Capacity	12.5L
启动方式/Starting System	0.6L
尺寸/Dimension	605X440X445mm
重量/Weight	42KG



QF-4400

排量/Displacement	210cc
功率/Horse Power	6.5HP
燃油类别/Fuel type	Gasoline (Petrol)
油箱容量/Fuel Tank Capacity	12.5L
启动方式/Starting System	0.6L
尺寸/Dimension	605X440X445mm
重量/Weight	44KG






168F-1 部件 / PARTS



PUMP 部件 / PARTS

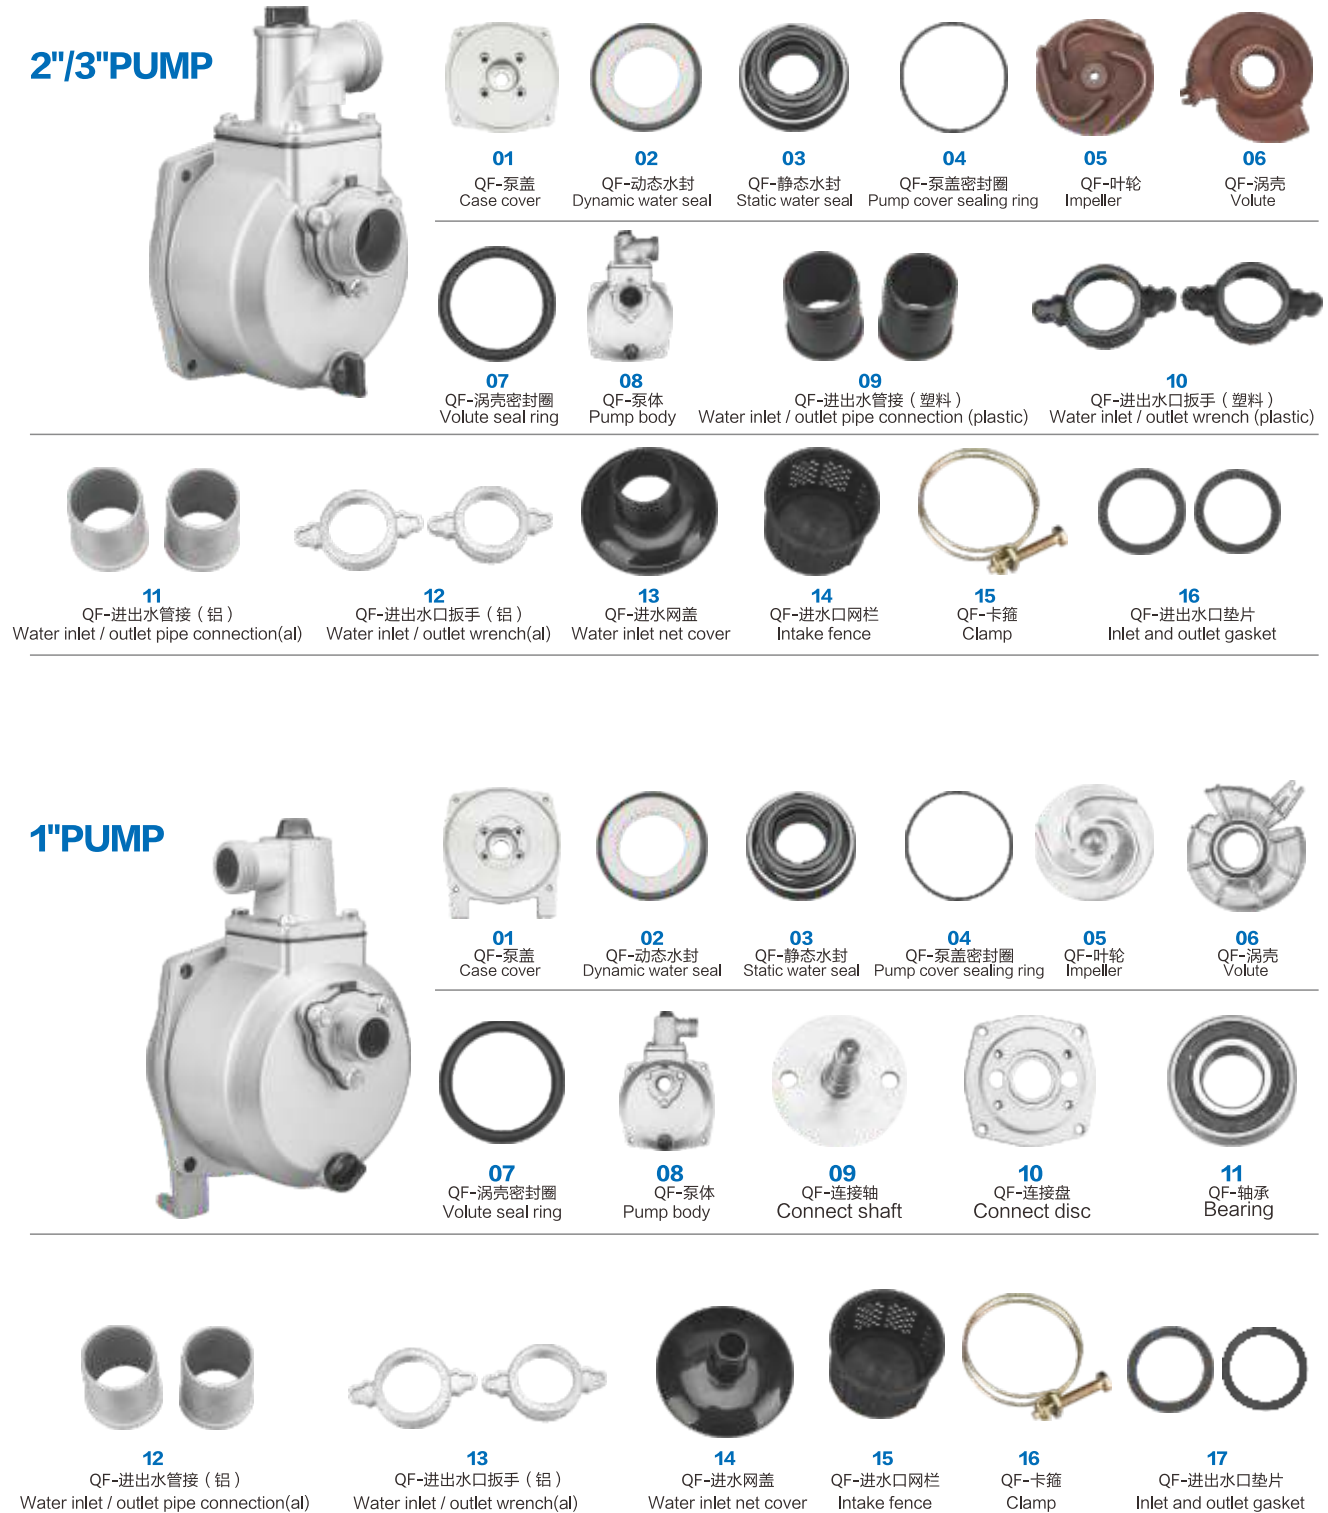




				
QF-21 9米高压清洗管 9m High pressure hose	QF-22曲轴Crank shaft	QF-23担架Stretcher	QF-24日式担架Japanese stretcher	
				
QF-25三档皮带轮Pulley -3 wings	QF-26五档皮带轮Pulley -5 wings	QF-27气室Air Chamber	QF-28加长气室Longer air chamber	QF-29吸水滤网Filter Net
				
QF-30 1/4球阀开关 1/4 Cock	QF-31 1/2开关1/2 Cock	QF-32 1/2本色开关Cock with original color	QF-33 3/8转1/2开关3/8 to 1/2 cock	QF-34 3/8开关3/8 cock
				
QF-35 1/4直通开关1/4Ball cock	QF-36 1/4开关1/4 Cock	QF-37 1/4三通开关 Tri-entrance cock	QF-38 1/2铜接头1/2 Brass joint	QF-39 3/4转1/2外接3/4 to 1/2 External
				
QF-40 φ8.5mm双头斜口 two way joint	QF-41 φ19mm胶管组件 hose joint	QF-42 φ19mm进水组件 suction joint	QF-43 三通Y-joint	QF-44 活动接头Flexible joint
				
QF-45 φ8.5mm胶管组件hose joint	QF-46 φ8.5/10mm胶管组件hose joint	QF-47 φ13mm胶管组件hose joint	QF-48 φ8.5mm大活接Hose big flexible joint	QF-49 φ8.5mm小活接Hose small flexible joint
				
QF-50 曲轴油封Oil seal crank shaft	QF-51 柱塞油封Oil seal plunger	QF-52 V型平垫V-Packing seat	QF-53 V型圈V-Packing	QF-54 夹布V型Special V-Packing
				
QF-55 A1016皮带A1016 V-Belt	QF-56 挡水环Breakwater Ring	QF-57 阀套Valve Seal	QF-58 黄油追紧Grease seal	QF-59 轴承Bearing
				
QF-60 汽油机皮带轮Gasoline engine wheel	QF-61 不锈钢活门Stainless steel valve	QF-62 塑料活门Plastic Valve	QF-63 回水油封Oil Seal Overflow	QF-64 弹簧衬托Spring Seat

				
QF-65 曲轴箱Crank Case	QF-66 摇管架Pipe Rack	QF-67 螺纹进回水管 Screw thread transparent suction&overflow hose	QF-68 进回水管Suction&overflow hose	
				
QF-69 缸体Cylinder	QF-70 排水室Discharge Metal	QF-71 进水室Suction Metal	QF-72 回水体Overflow Body	
				
QF-73 握手调压组件Partial Regulator	QF-74 握手调压总成Regulator Assy	QF-75 韩式握手调压组件 Partial Regulator-Korea Style	QF-76 调压管Regulator Pipe	QF-77 压力表Pressure Gauge
				
QF-78 加油盖 Oil Cover	QF-79 轴承 "A" Bearing Cover "A"	QF-80 轴承 "B" Bearing Cover "B"	QF-81调压轮Adjusting pressure screw	QF-82 探油镜oil level
				
QF-83 调压弹簧regulator spring	QF-84 平键销Pin	QF-85 后盖垫gasket	QF-86 放油螺丝screw for oil outlet	QF-87 阀座Valve seat
				
QF-88 弹簧销spring Pin	QF-89 阀杆valve rod	QF-90 压盖grand	QF-91 黄油环grease ring	QF-92 钢珠Ball
				
QF-93 自卸阀杆valve rod for automatic	QF-94 铜油杯brass grease cup	QF-95 铁油杯iron grease cup	QF-96 调压扳手regulator spanner	QF-97 连杆connecting rod
				
QF-98 陶瓷柱塞ceramic plunger	QF-99 柱塞plunger	QF-100 柱塞销plunger pin	QF-101 铁进水斜口iron suction joint	QF-102 铁回水斜口iron overflow joint
				
QF-103 进水两角螺帽 suction hose nut (two wings)	QF-104 进水六角螺帽 suction hose nut (HEX)	QF-105 回水两角螺帽 overflow hose nut (two wings)	QF-106 回水六角螺帽 overflow hose nut (HEX)	QF-107 泵脚bed, crank case



分解图 / Decomposition graph

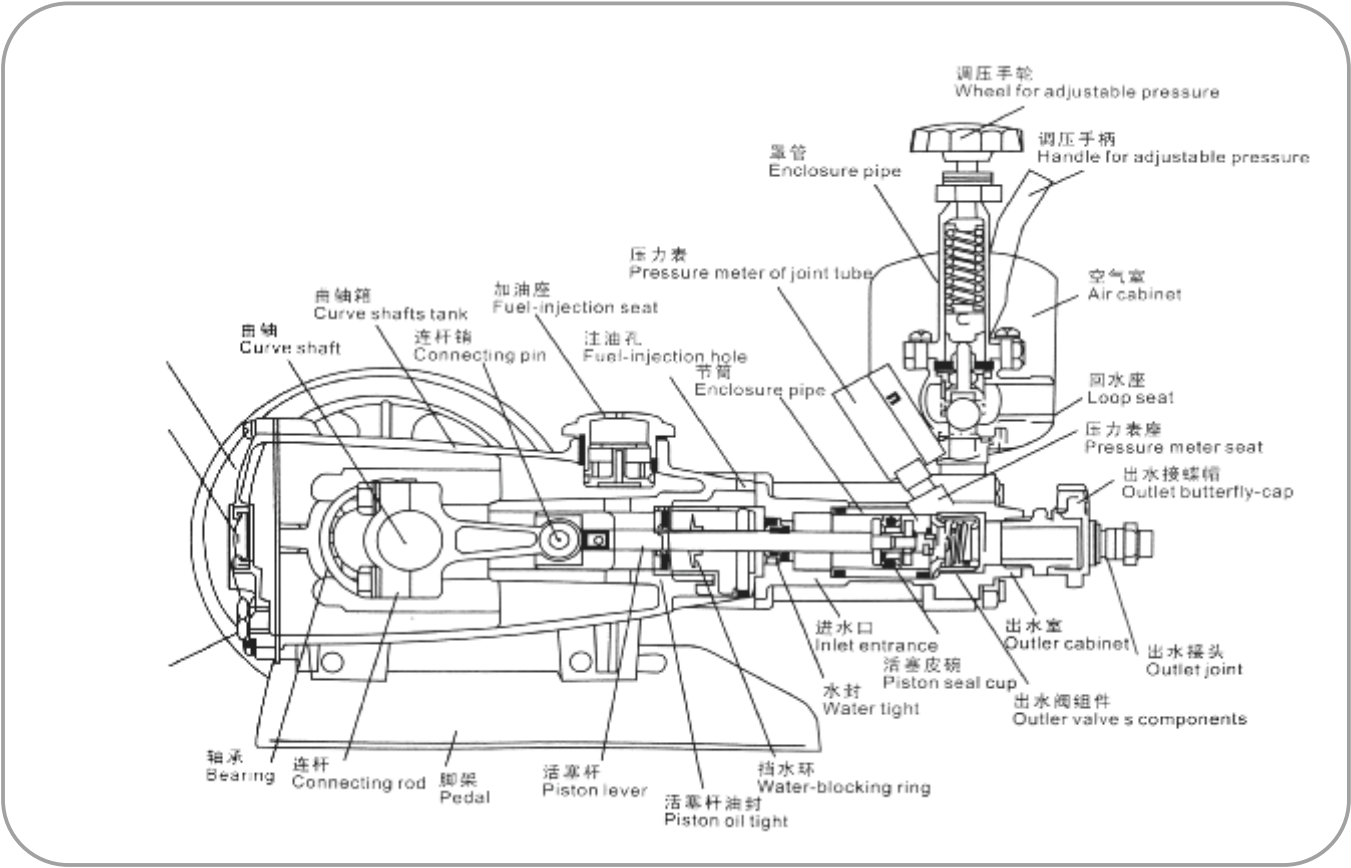

THANK YOU
FOR CHOOSING US

感谢关注 台州庆丰

WWW.SPRAYER-CHINA.COM | Professional manufacturer of garden machinery